



**LOIRE MAINE  
MANUTENTION**

Vente, location et entretien



**C 300 H  
C 300 H x4  
C 350 H  
C 350 H x4**



**FullGrip® System exclusivo AUSA:**  
Tracción integral por discos múltiples conectable electro-hidráulicamente desde el mando joystick.

**Exclusive AUSA FullGrip® System:**  
On demand 4WD connectable by means multiple discs with electro-hydraulic engagement from the joystick.

**FullGrip® System de AUSA:**  
4 RM sur demande au moyen de disques multiples avec connexion electro-hydraulique depuis le joystick.

**AUSA FullGrip® System:**  
Elektrohydraulisch, zuschaltbarer Allradantrieb - am Joystick zu betätigen.



[www.ausa.com](http://www.ausa.com)

**AUSA Center, S.L**  
Ctra. de Vic Km 2.8  
08243 Manresa  
**BARCELONA (ESPAÑA)**  
Tel.: +34 93 874 73 11  
E-mail: [ausa@ausa.com](mailto:ausa@ausa.com)  
[www.ausa.com](http://www.ausa.com)




**AUSA Madrid** Pol. Ind. Coslada - C. Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) - Tel.: +34 91 669 00 06 - E-mail: [ausa\\_madrid@ausa.com](mailto:ausa_madrid@ausa.com)  
**AUSA France** Z.I. Saint Charles - Rue de Zürich, 66000 PERPIGNAN (FRANCE) - Tel.: +33 (0) 4 68 54 38 97 - E-mail: [ausa.france@ausa.com](mailto:ausa.france@ausa.com)  
**AUSA Deutschland** Tel.: +49 (0) 2384 9889905 - E-mail: [ausa.deutschland@ausa.com](mailto:ausa.deutschland@ausa.com)  
**AUSA UK** Tel.: +44 (0) 7970639988 - E-mail: [ausa.uk@ausa.com](mailto:ausa.uk@ausa.com)  
**AUSA Brasil** Avenida Belizario Ramos 2276 - Lages - SC, 88506-000 (BRASIL) - Tel.: +55 11 9 8786 6014 - E-mail: [ausa.brasil@ausa.com](mailto:ausa.brasil@ausa.com)  
**AUSA México** Calzada Vallejo 725 Del. Gustavo A. Madero - 07750 México D.F. (MÉXICO) - Tel.: +52(55) 21669276 - E-mail: [ausa.mexico@ausa.com](mailto:ausa.mexico@ausa.com)  
**AUSA U.S. CORP.** Tel.: +1 (917) 328 0770 - E-mail: [ausa.us@ausa.com](mailto:ausa.us@ausa.com)  
**AUSA Beijing Rep. Office** Room 403, Moma Building, N.199 - Chaoyang bei road, Chaoyang District - 100026 BEIJING (CHINA)  
Tel.: +86 10 8598 7386 - E-mail: [ausa.china@ausa.com](mailto:ausa.china@ausa.com)

**C 300 H/x4\_3000Kg**  
**C 350 H/x4\_3500Kg**

**AUSA**  
www.ausa.com

DIMENSIONS (mm)	C 300 H	C 300 Hx4	C 350 H	C 350 Hx4
A	2200	2200	2240	2240
B	270	290	300	320
C	325	325	380	380
D	1460	1460	1460	1460
(narrow axle) E	1540	1540(H/H)	1770	1770(H/H)
(wide axle) E	1800	1800(H)	2010	2010(H)
F	3500	4280	3500	4280
G	2850	3005	2850	3005
I	120	120	120	120
J	50	50	50	50
K	750	750	750	750
L	4500	45000	4500	4500
M	600	600	600	600
N	1950	1950	1950	1950
O	1200	1200	1200	1200
P	5600	6805	5600	6805

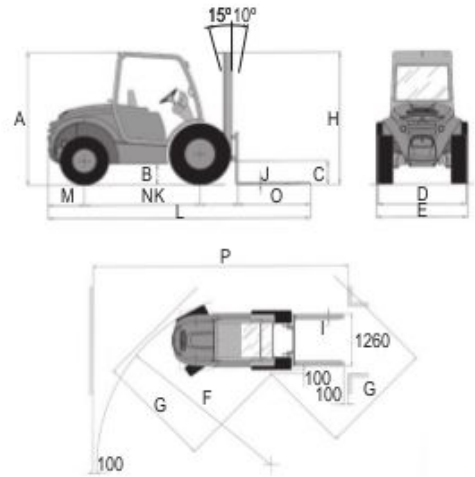

Type of mast	Maximum lifting height (mm)	Free lift (mm)	Machine height with mast retracted (mm)		Machine height with mast extended (mm)		Load (Kg) at max. height - according stability test standard (A/B)*					
			C 300 H C 300 Hx4	C 350 H C 350 Hx4	C 300 H C 300 Hx4	C 350 H C 350 Hx4	(A) C 300 Hx4 (narrow axle)	(B) C 300 Hx4 Version HI (narrow axle)	(A) C 300 Hx4 (wide axle)	(A) C350H / Hx4 (narrow axle)	(A) C350H / Hx4 (wide axle)	(B) C 350 H / Hx4 Version HI (narrow axle)
Duplex (Std.)	3300	120	2600	2670	4500	4500	3000	3000	3000	3500	3500	3500
Duplex	4000	120	2950	2990	5200	5200	2250	2550	3000	3000	3500	3000
Triplex (free lift)	3700	1200	2090	2130	4900	4900	2400	2700	3000	3200	3500	3200
Triplex (free lift)	5400	1680	2660	2700	6600	6600	-	1300	1500	-	1800	1500
Triplex (free lift)	6850	2280	-	3220	-	7820	-	1000	-	-	600	1200

**TECHNICAL SPECIFICATIONS**

	C 300 H	C 300 Hx4	C 350 H	C 350 Hx4	
Load capacity (kg) @ centre of gravity	3000 a 500mm / 2900 a 600mm		3500 a 500mm / 3250 a 600mm		
Lifting height (Standard duplex mast) (mm)	3300				
Engine	Diesel KUBOTA V 2403 - M		KUBOTA V 3600		
Power acc. (KW/HP)	36.5 / 48.6		48.6		
N° of cylinders	4				
Cooling system	Water				
Traction	4x2	4x4 FullGrip®	4x2	4x4 FullGrip®	
Transmission	Hydrostatic with variable flow pump and automatic regulation. Electric gear inverter in joystick. Inching pedal.				
Unladen weight (Kg) (with full tanks)	4700	4900	5000	5200	
Gradeability	30%	44%	25%	34%	
Speed (Maximum) (Kmh)	20				
Engine starting system	Electric				
Tyres	Front Rear	12.5 / 80-18 27x10-12	12.5 / 80-18 10.0 / 75-15.3	16.5 / 70-20 27x10-12	16.5 / 70-20 10.0 / 75-15.3
Steering	Hydraulic. Working pressure 140 bar.				
External turning radius (mm)	3500	4300	3500	4300	
Tank capacity (l)	Equal Hydraulic fluid	80		85	
Service brake	Oil-immersed, multidisc				
Parking brake	Oil-immersed, multidisc				
Hydraulic circuit	18-8 cc. double gear pump. Working pressure 170 bar.		18-8 cc. double gear pump. Working pressure 190 bar.		
Operating pressures for accessories	170		190		
Fork carriage	FEM 3 - Wide: 1200mm (optional: 1660mm)				
Stability test standard	(A)* (B)*	For rough terrain use - Models H - EN 1726-1; Annex H For industrial use - Models HI - ISO 1074			

**STANDARD EQUIPMENT**

- Open and tilting cabin
- Joystick with integrated functions, "total control of movements"
- Ergonomic and comfort seat with height, weight and distance adjustable with seat belt
- Audible reverse warning
- Rear view mirrors
- Rotating beacon
- 3rd auxiliary hydraulic service
- Side-shift

**OPTIONAL EQUIPMENT**

- Semi - closed cabin
- Closed cabin with heater
- Radiostereo CD
- Electronic anti-theft protection system
- Homologated lighting equipment
- Air Conditioning
- Working lights
- 4th auxiliary hydraulic service
- 5th auxiliary hydraulic service
- Catalytic converter
- Spark arrester
- Load backrest
- Limited slip differential in front axle
- Enhanced heater for Nordic countries
- 800, 800 and 1000 litre hydraulic buckets
- Many other attachments fitted with manufacturer warranty

MKT21011.09/06.2014

AUSA reserves the right to make any changes in the specifications without prior notice.